


KINGSCLIFF EDM BASELINE

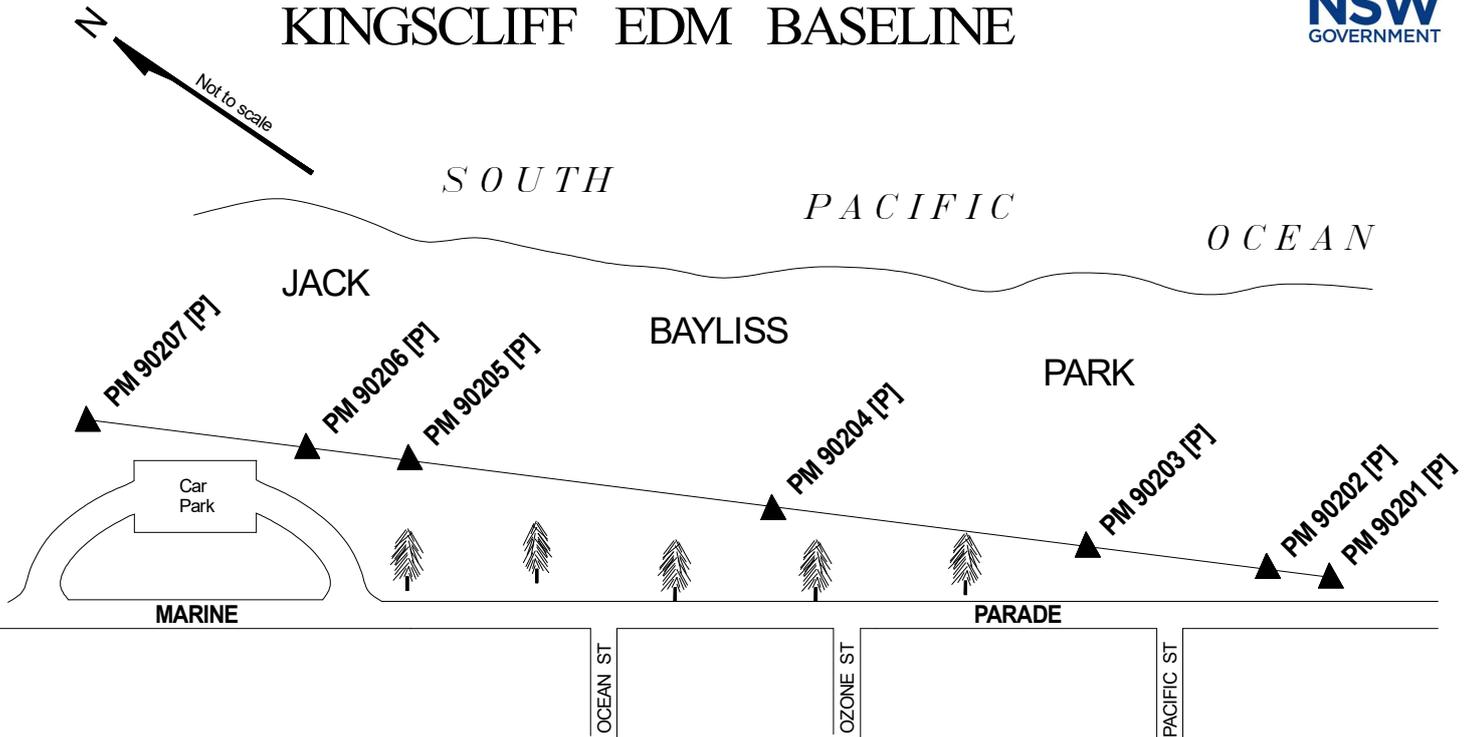

Authorised access only - For baseline booking please refer to website: www.spatial.nsw.gov.au/edmbooking (3/8" Allen key required to remove pillar caps)

HORIZONTAL DISTANCES (metres) at datum 7.443 m AHD

From	To	Distance	Mark	R.L. (AHD) *
PM 90201	PM 90202	28.3298	PM 90201	9.388
PM 90201	PM 90203	130.8330	PM 90202	9.012
PM 90201	PM 90204	332.6288	PM 90203	8.258
PM 90201	PM 90205	564.2208	PM 90204	7.443
PM 90201	PM 90206	628.3341	PM 90205	7.904
PM 90201	PM 90207	721.2589	PM 90206	8.114
			PM 90207	8.646

* The Reduced Levels (metres) were not determined at this date and are on an approximate AHD datum. These height measurements are outside the NATA Scope of Accreditation.

Method of verification: Surveyor-General procedure VA-QMS-01

Reference instrument used : Leica TS 30, Serial No. 360783
 Verified in accordance with Regulation 13 of the National Measurement Regulations 1999.

Uncertainty of distances: +/- (0.6 + 1.3 x 10⁻³L) mm, L= length in metres
 This uncertainty is calculated in accordance with the principles of the ISO Guide to the Expression of Uncertainty in Measurement, with an interval estimated to have a confidence level of 95% and a coverage factor of 2. The uncertainty applies at the time of measurement only and takes no account of pillar movement that may occur after the date of verification.



Accredited for compliance with ISO/IEC 17025 - Calibration
 All equipment used is calibrated by NATA accredited laboratories, and the measurements included in this document are traceable to SI units.
 This document shall not be reproduced, except in full.
 NATA Accredited Laboratory Number: 14965

R K Lock date: 09/05/24
 Senior Surveyor
 (Legal Metrology Officer)
 for the Surveyor-General of NSW
Date of Verification: 20 March 2024