
## MEASUREMENT REPORT



## GOULBURN EDM TESTLINE

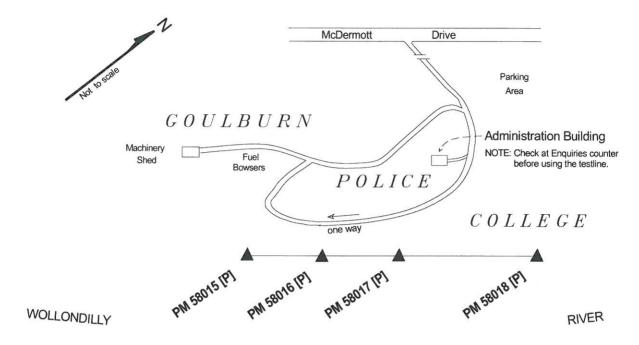

ACCESS: Obtain prior approval from Police Academy administration office, ph 4828 8525 (10mm Allen key required to remove pillar caps)

## HORIZONTAL DISTANCES (metres) AT DATUM 628.532 m AHD

From	То	Distance	Mark	RL (AHD) *
PM 58015	PM 58016	93.103	PM 58015	631.629
PM 58015	PM 58017	246.597	PM 58016	629.003
PM 58015	PM 58018	496.863	PM 58017	628.552
			PM 58018	628.532

<sup>\*</sup> The Reduced Levels (in metres AHD) were not re-verified at this date.

Method of verification: VA-QM-01 and NMI's Verifying Authorities Handbook, 2nd Ed. November 1988

Distances by the Surveyor-General of NSW, in accordance with the verification of a Reference standard of length as prescribed by the National Measurement Act 1960.

Instrument used: Leica TS 30, Serial No. 360783

Verified in accordance with Regulation 13 of the National Measurement Regulations 1999.

Uncertainty of distances: +/- (0.5mm + 1.3ppm)

This uncertainty is calculated in accordance with the principles of the ISO Guide to the Expression of Uncertainty in Measurement, with an interval estimated to have a confidence level of 95% and a coverage factor of 2. The uncertainty applies at the time of measurement only and takes no account of pillar movement that may occur after the date of verification.

NATA

Accredited for compliance with ISO/IEC 17025.

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian national standards.

This document shall not be reproduced, except in full.

NATA Accredited Laboratory Number: 14965

R. K. Lock date 18/11/13 Senior Surveyor

Legal Metrology Officer for the Surveyor-General of NSW

Date of Verification: 17 June 2013